


FAST FIT Curb Stop

- Straight CTS x Meter

Submittal Information

Philmac

The connection you can trust.

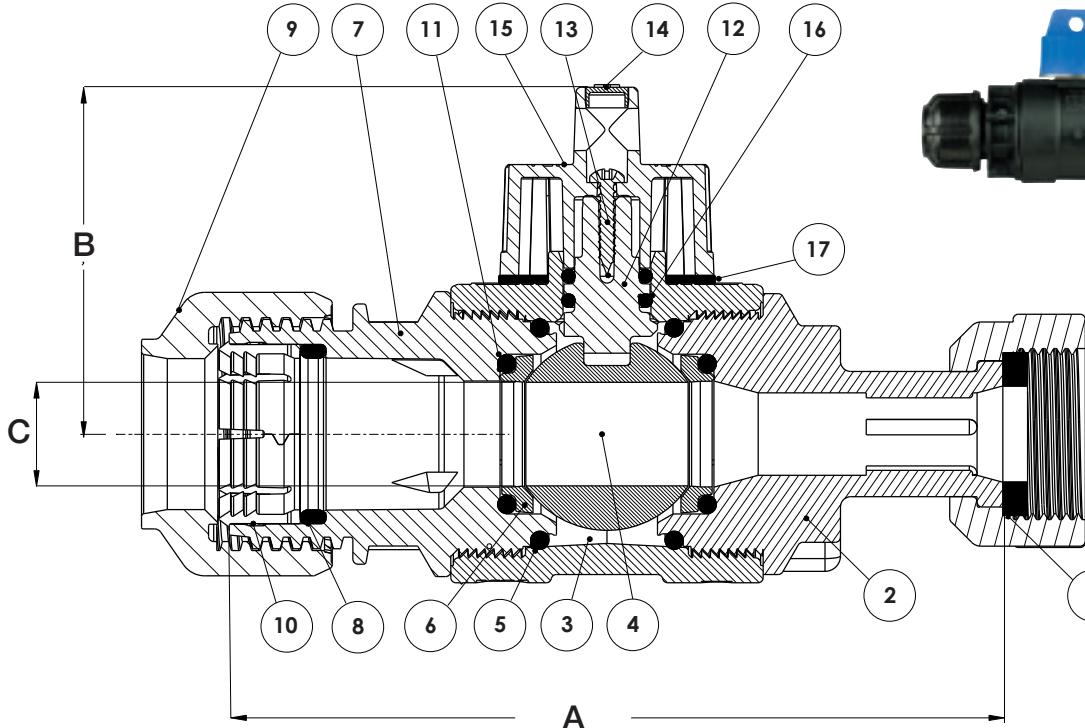

Product Number	CTS	Meter	Dimensions		
			A	B	C
76-091933	3/4"	3/4"	5.83	2.7	0.8
76-091943	1"	3/4"	5.91	2.7	0.8
76-091944	1"	1"	5.91	2.7	0.8
76-091954	1-1/4"	1"	6.02	2.7	0.8

Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

1	Meter Nut Washer	NBR Black
2	Meter Nut Body	Noryl GTX 810 10% Black
3	Valve Body	Nylon 6 30% GF Black
4	Ball	20% PTFE Filled Polypropylene
5	Body O-ring	NBR Black
6	Ball Seal Ring	20% PTFE Filled Polypropylene
7	Compression Body	Nylon 6 30% GF Black
8	Compression Seal	NBR Black
9	Compression Nut	Acetal Black
10	Compression Grip	Acetal Black
11	Ball O-ring	NBR Black
12	Spindle	Noryl GTX 810 10% Black
13	Screw	Stainless Steel 316
14	Plug	Polypropylene Blue
15	Handle	Nylon 6 30% GF Blue
16	Dual Spindle O-ring	NBR Black
17	Lock Plate	Stainless Steel 316

Submitted by:

The Harrington Corporation
3721 Cohen Place, Lynchburg,
VA 24501
Phone 434-845-7094

DISTRIBUTED BY

