


# FAST FIT Curb Stop

## - Straight IPS-OD x Meter

### Submittal Information

**Philmac**  
The connection you can trust.

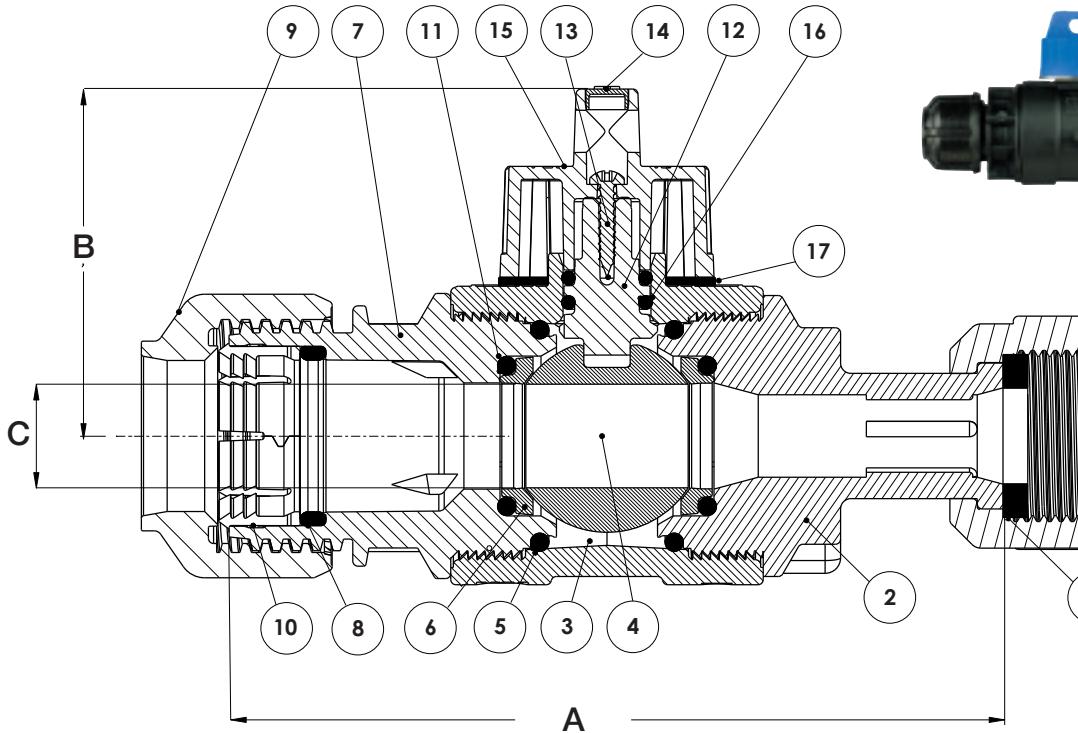

Product Number	IPS-OD	Meter	Dimensions		
			A	B	C
76-093933	3/4"	3/4"	5.91	2.7	0.8
76-093943	1"	3/4"	6.02	2.7	0.8

<b>1</b>	Meter Nut Washer	NBR Black
<b>2</b>	Meter Nut Body	Noryl GTX 810 10% Black
<b>3</b>	Valve Body	Nylon 6 30% GF Black
<b>4</b>	Ball	20% PTFE Filled Polypropylene
<b>5</b>	Body O-ring	NBR Black
<b>6</b>	Ball Seal Ring	20% PTFE Filled Polypropylene
<b>7</b>	Compression Body	Nylon 6 30% GF Black
<b>8</b>	Compression Seal	NBR Black
<b>9</b>	Compression Nut	Acetal Black
<b>10</b>	Compression Grip	Acetal Black
<b>11</b>	Ball O-ring	NBR Black
<b>12</b>	Spindle	Noryl GTX 810 10% Black
<b>13</b>	Screw	Stainless Steel 316
<b>14</b>	Plug	Polypropylene Blue
<b>15</b>	Handle	Nylon 6 30% GF Blue
<b>16</b>	Dual Spindle O-ring	NBR Black
<b>17</b>	Lock Plate	Stainless Steel 316

#### Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

Submitted by:

**The Harrington Corporation**  
3721 Cohen Place, Lynchburg,  
VA 24501  
Phone 434-845-7094

DISTRIBUTED BY

