


FAST FIT Curb Stop- Straight UTC x Meter

Submittal Information

Philmac

The connection you can trust.

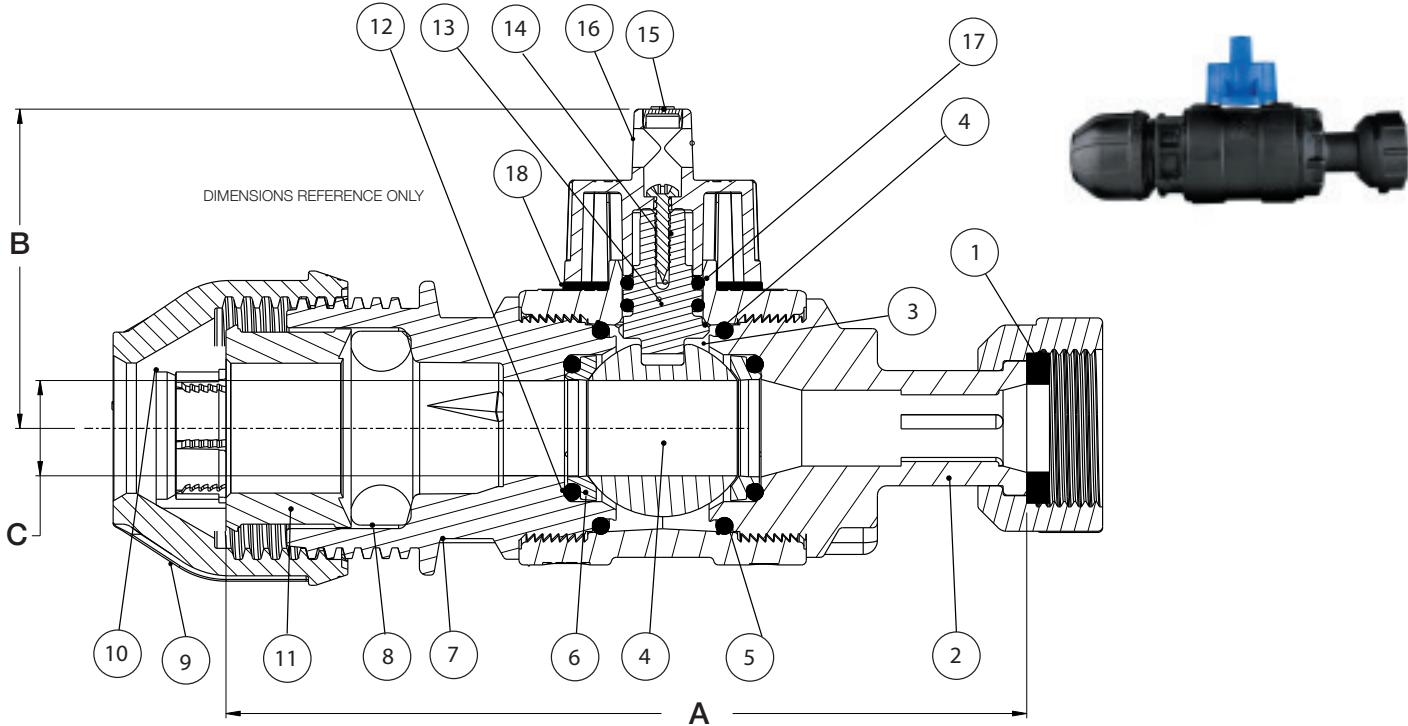

Product Number	UTC	Meter	Dimensions		
			A	B	C
76-0969B3	0.83"-1.06" [21-27mm]	3/4"	6.15	2.7	0.8
76-0969B4	0.83"-1.06" [21-27mm]	1"	6.15	2.7	0.8
76-0969C3	1.06"-1.34" [27-34mm]	3/4"	6.42	2.7	0.8
76-0969C4	1.06"-1.34" [27-34mm]	1"	6.42	2.7	0.8

Certified to NSF 61 - Conforms to AWWA C800 and AWWA C521 - Rated to 230 PSI

- Valve is non-directional and is water-tight with flow in either direction
- Reinforced polyamide composite valve which is corrosion resistant
- Reinforced polyamide composite materials which are lead and contaminant free
- Reinforced polyamide composite material to allow the use of any normal tightening wrench
- Valve and handle lugs to enable valve to be locked in closed position with either padlock or barrel lock
- Compression gripping mechanism to ensure full tensile performance without the use of an internal pipe stiffener
- Compliant with the following meters - 5/8" x 3/4", 3/4" & 1"

1	Meter Nut Washer	NBR Black
2	Meter Nut Body	Noryl GTX 810 10% Black
3	Valve Body	Nylon 6 30% GF Black
4	Ball	20% PTFE Filled Polypropylene
5	Body O-ring	NBR Black
6	Ball Seal Ring	20% PTFE Filled Polypropylene
7	Compression Body	Nylon 6 30% GF Black
8	UTC Seal	EPDM
9	UTC Nut	Acetal Black
10	UTC Grip Ring	Acetal Black/Stainless Steel
11	UTC Spacer	Acetal Black
12	Ball O-ring	NBR Black
13	Spindle	Noryl GTX 810 10% Black
14	Screw	Stainless Steel 316
15	Plug	Polypropylene Blue
16	Handle	Nylon 6 30% GF Blue
17	Dual Spindle O-ring	NBR Black
18	Lock Plate	Stainless Steel 316

Submitted by:

The Harrington Corporation
3721 Cohen Place, Lynchburg,
VA 24501
Phone 434-845-7094

